


# Teknoayrac

Mold-release Agent Providing Distressed  
Appearance for Stamped Concrete

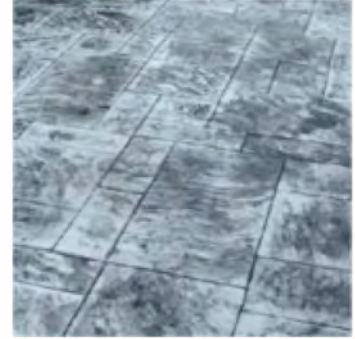

**Product Description** It is a one component, pulverized product which provides both mold-release agent and colorant, distressed surface appearance in stamped concrete systems.

**Areas of Usage**

- Inner and outer spaces,
- Vehicle and walking trails, pavements ,
- Malls, fair areas,
- It is used in molds used on stamped concrete systems.

**Features and Benefits**

- It avoids stamped concrete system molds to stick on concrete and breakage of edges.
- It avoids mold to separate from concrete easily and fast.
- It allows mold figures to reflect on concrete surface completely.
- It leaves distressed-impression on applied TEKNOSERBASKI surface.

**Application Instructions**

After TEKNOSERBASKI application, TEKNOAYRAC pulverized material is scattered on surface completely. Printing system by molds is applied. Pressurized washing treatment is applied depending on required surface 1-2 days later. As high-pressure washing creates less- distressed view, low-pressure washing creates a more distressed surface view.

It should be protected against negative weather conditions such as direct sunlight, strong wind, high air temperature (over +35°C), rain and frost after the application. As hardening will be completed a few days after the application, cleaning can be done only by using mechanical equipment. Immediately after the application, just be ore becoming hard, equipment should be washed with water and hands should be washed with clean arm water and soap.

**Application Notes / Restrictions**

- Product may irritate the skin.
- Protective gloves, mask and goggles should be used.
- In case of using less than required, demanded decorative image may not be obtained
- In case of contacting mortar with eyes, eyes should be washed witwarm water and medical advice should be sought.
- Product may irritate the skin. Protective gloves, mask and goggles should be used, protective cream may be applied to hand before starting to work.
- In case of contacting mortar with eyes, eyes should be washed with warm water and medical advice should be sought.

## Technical Data

General Information	
Appearance	White and grey powder
Package	20 kg-Kraft bag
Shelf Life	12 months
Wastage	Approx. 0,200-0,400 kg/m <sup>2</sup>

